

LED PL LAMP TYPE A+B

6" Can suitable and 26W CFL equivalent

Built-in thermal detector can cut off the power from over driven of incompatible electrical ballast

Not use for totally enclosed fixtures

180° Rotatable (Horizontal Models)

Hybrid technology, 120-277V AC or Driven by CFL ballast

Die casting Aluminum heat sink

Universal G24q-4pin base can retrofits G24q-1, G24q-2, G24q-3, GX24q-1, GX24q-2 and GX24q-3

UL approved for damp locations

Non dimmable




ORDERING GUIDE

Example: 12PL02VG24QLED40

Wattage	Type	Configuration	Base	Voltage	CCT
• 12PL 12W	• 02 Type A+B	• H Horizontal • V Vertical	• G24Q G24Q 4-pin Base	• LED Driven by CFL Ballast and 120-277VAC	• 27 2700K (900LM) • 30 3000K (900LM) • 35 3500K (1000LM) • 40 4000K (1100LM) • 50 5000K (1100LM)

DIMENSIONS

Configuration	Length (L)	Width (W)	Height (H)
H Horizontal	147.82 mm / 5.82"	34.80 mm / 1.37"	34.80 mm / 1.37"
V Vertical	96.01 mm / 3.78"	75.95 mm / 2.99"	75.95 mm / 2.99"

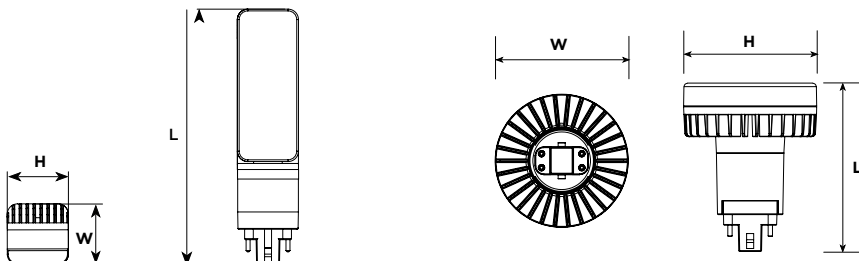

Date:	Project:	Notes:
-------	----------	--------

Ballast Description			Compatibility Test Result			
Electrical Characteristic			1-Lamp		2-Lamp	
Brand	Model	Volt	120 VAC	277 VAC	120 VAC	277 VAC
LUMA PRO	16X954	120-277V	✓	×	✓	✓
LUMA PRO	4KGJ7	120-277V	✓	✓	✓	✓
LUMA PRO	4KGJ8	120-277V	✓	✓	✓	✓
LUMA PRO	16X959	120-277V	×	×	✓	✓
Universal/Triad	C213UNVME	120-277V	✓	✓	✓	✓
Universal/Triad	C218UNVME	120-277V	✓	✓	✓	✓
Universal/Triad	C242UNVME	120-277V	✓	×	✓	✓
Universal/Triad	C2642UNVME	120-277V	✓	✓	✓	✓
HOWARD INDUSTRIES	EP2/13CF/MV	120-277V	✓	✓	✓	✓
HOWARD INDUSTRIES	EP2/18CF/MV	120-277V	✓	✓	✓	✓
HOWARD INDUSTRIES	EP/2/26CF/MV/2	120-277V	✓	✓	✓	✓
GE	GEC218MVPSBES	120-277V	✓	✓	✓	✓
PHILIPS/ADVANCE	ICF-2S18-H1-LD	120-277V	✓	✓	✓	✓
PHILIPS/ADVANCE	ICF-2S26-H1-LD	120-277V	✓	✓	✓	✓
PHILIPS/ADVANCE	ICF-2S42-M2-LD	120-277V	✓	×	✓	✓
PHILIPS/ADVANCE	ICF-2S13-H1-LD	120-277V	✓	✓	✓	✓
ORSRAM/SYLVANIA	QTP1/2X18CF/UNVDM	120-277V	✓	✓	✓	✓
ORSRAM/SYLVANIA	QTP2X26CF/UNVDM	120-277V	✓	✓	✓	✓
ORSRAM/SYLVANIA	QTP1/2X13CF/UNVDM	120-277V	✓	✓	✓	✓
HATCH	HC226PS/UV/D	120-277V	✓	✓	✓	✓
CH	ACT2S26PSUNV	120-277V	✓	✓	✓	✓
STANDARD	31279STD	120-347V	✓	✓	✓	✓
STANDARD	31527STD	120-347V	×	✓	×	✓
KEYSTONE	KTEB-213-UV-PS-DW	120-277V	✓	✓	✓	✓
KEYSTONE	KTEB-218-UV-PS-DW	120-277V	✓	✓	✓	✓
KEYSTONE	KTEB-226-UV-PS-DW	120-277V	✓	✓	✓	✓
KEYSTONE	KTEB-218-UV-RS-DW	120-277V	✓	✓	✓	✓
FULHAM	RHAUNV226C	120-277V	×	×	✓	✓
FULHAM	WH2120L	120-277V	✓	×	✓	×
FULHAM	WH2120C	120-277V	✓	×	✓	×
FULHAM	RHAUNV213C	120-277V	×	×	✓	✓
FULHAM	RHA-UNV-218-C	120-277V	×	×	✓	✓
FULHAM	WH3-120-C	120-277V	✓	×	✓	×
FULHAM	WH3-277-L	120-277V	×	✓	×	✓
FULHAM	WH4-277-L	120-277V	×	✓	×	✓
FULHAM	RHA-UNV-242-C	120-277V	×	×	✓	✓

© 2026 Legental. All rights reserved. This document is for informational purposes only. No part of this publication may be reproduced, in whole or in part, without prior written permission from Legental. While the information provided is believed to be accurate and reliable, it is subject to change without notice and does not constitute part of any contract or quotation. Legental assumes no responsibility for any consequences resulting from the use of this information and reserves the right to modify product specifications at any time without prior notice.

Legental
Ph: 281-965-5791

