

TYPE A LED PL RETROFIT LAMP

Safety Warnings

ELECTRICAL HAZARD - TURN OFF POWER AT MAIN CIRCUIT BREAKER BEFORE INSTALLATION

General Safety Requirements

- Commercial installations must be performed by a qualified, licensed electrician
- Confirm supply voltage matches luminaire specifications
- Use only UL-listed wire connectors and conductors rated for 90°C minimum
- Do not look directly at illuminated light source
- Allow fixture to cool completely before handling or bulb replacement
- Keep packaging materials away from children (choking hazard)

Important Reminder

- Please check that all accessories are included upon delivery. If anything is missing, contact customer service immediately for a replacement.

Installation Precautions

- Inspect fixture for damage before installation
- Do not expose wiring to sharp edges or modify enclosure holes
- Do not relocate pre-installed green ground screw
- Secure all connections and dispose of residues/fingerprints
- Suitable for dry or damp locations only

Description


Type A LED PL retrofit lamps can be used as a replacement for 4-pin compact fluorescent bulbs (CFLs) and compatible with electrical ballasts. Installation can be direct plug-and-play with a working and compatible ballast(list in next page).

INSTALLATION METHODS

Method A: Retrofit with One Lamp (G24Q Base)

- Direct plug-and-play installation


BEFORE

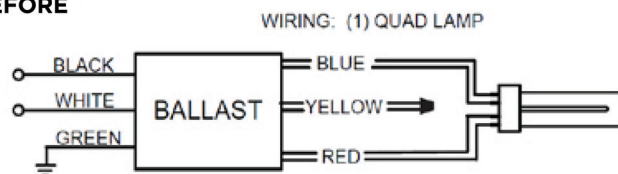

Method B: Retrofit with Two Lamps (G24Q Base)

- For fixtures using two lamps with minimum 1mm spacing

BEFORE

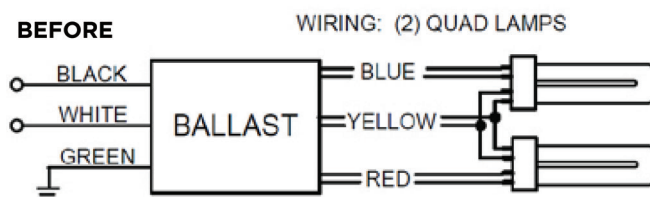

REMARK:

- This lamp only operates on electronic ballasts
- If lamp does not light when the luminaire is energized, remove the lamp, examine the luminaire and contact lamp manufacturer or qualified electrician

Installation Steps:

Turn off power at main breaker. Remove existing CFL by rotating counterclockwise. Verify ballast compatibility (see page 2). Insert LED PL lamp into G24Q socket and rotate clockwise until secured. For Horizontal models, adjust lamp orientation up to 180°. Restore power and test.

Compatible Ballasts List

Ballast Description			Compatibility Test Result			
Electrical Characteristic			1-Lamp		2-Lamp	
Brand	Model	Volt	120 VAC	277 VAC	120 VAC	277 VAC
LUMA PRO	16X954	120-277V	✓	×	✓	✓
LUMA PRO	4KGJ7	120-277V	✓	✓	✓	✓
LUMA PRO	4KGJ8	120-277V	✓	✓	✓	✓
LUMA PRO	16X959	120-277V	×	×	✓	✓
Universal/Triad	C213UNVME	120-277V	✓	✓	✓	✓
Universal/Triad	C218UNVME	120-277V	✓	✓	✓	✓
Universal/Triad	C242UNVME	120-277V	✓	×	✓	✓
Universal/Triad	C2642UNVME	120-277V	✓	✓	✓	✓
HOWARD INDUSTRIES	EP2/13CF/MV	120-277V	✓	✓	✓	✓
HOWARD INDUSTRIES	EP2/18CF/MV	120-277V	✓	✓	✓	✓
HOWARD INDUSTRIES	EP/2/26CF/MV/2	120-277V	✓	✓	✓	✓
GE	GEC218MVPSBES	120-277V	✓	✓	✓	✓
PHILIPS/ADVANCE	ICF-2S18-H1-LD	120-277V	✓	✓	✓	✓
PHILIPS/ADVANCE	ICF-2S26-H1-LD	120-277V	✓	✓	✓	✓
PHILIPS/ADVANCE	ICF-2S42-M2-LD	120-277V	✓	×	✓	✓
PHILIPS/ADVANCE	ICF-2S13-H1-LD	120-277V	✓	✓	✓	✓
ORSRAM/SYLVANIA	QTP1/2X18CF/UNVDM	120-277V	✓	✓	✓	✓
ORSRAM/SYLVANIA	QTP2X26CF/UNVDM	120-277V	✓	✓	✓	✓
ORSRAM/SYLVANIA	QTP1/2X13CF/UNVDM	120-277V	✓	✓	✓	✓
HATCH	HC226PS/UV/D	120-277V	✓	✓	✓	✓
CH	ACT2S26PSUNV	120-277V	✓	✓	✓	✓
STANDARD	31279STD	120-347V	✓	✓	✓	✓
STANDARD	31527STD	120-347V	×	✓	×	✓
KEYSTONE	KTEB-213-UV-PS-DW	120-277V	✓	✓	✓	✓
KEYSTONE	KTEB-218-UV-PS-DW	120-277V	✓	✓	✓	✓
KEYSTONE	KTEB-226-UV-PS-DW	120-277V	✓	✓	✓	✓
KEYSTONE	KTEB-218-UV-RS-DW	120-277V	✓	✓	✓	✓
FULHAM	RHAUNV226C	120-277V	×	×	✓	✓
FULHAM	WH2120L	120-277V	✓	×	✓	×
FULHAM	WH2120C	120-277V	✓	×	✓	×
FULHAM	RHAUNV213C	120-277V	×	×	✓	✓
FULHAM	RHA-UNV-218-C	120-277V	×	×	✓	✓
FULHAM	WH3-120-C	120-277V	✓	×	✓	×
FULHAM	WH3-277-L	120-277V	×	✓	×	✓
FULHAM	WH4-277-L	120-277V	×	✓	×	✓
FULHAM	RHA-UNV-242-C	120-277V	×	×	✓	✓

Remarks:

LED Type A PL G24Q Lamps have compatibility limitations and are not compatible with ALL ballasts. They were tested for compatibility with the above listed electronic ballasts. Ballasts not on the list might still be compatible but have not been tested. It is recommended to perform an on-site test before installing the LED lamps.

© 2025 Slite Electrical Supply Corporation. All rights reserved. This document is for informational purposes only and may not be reproduced without written permission. Information is subject to change without notice. Legental assumes no responsibility for consequences from using this information and reserves the right to modify specifications without notice. For complete terms and warranty information, visit www.slite.us

Need Help?

Call 1-281-965-5791 or visit www.slite.us

Stay Connected:

Visit our website for social media links and updates